
ILLUMINATOR DATA-ID

BHLX3-00-160X240-X-B-24V

Lighting Dimension

TMS

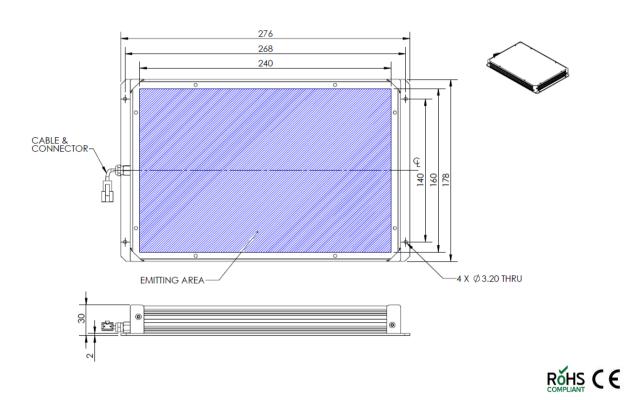

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	860 g
Length / Outer Diameter	276 mm
Width / Inner Diameter	178 mm
Thickness / Height	30 mm

ILLUMINATOR DATA-ID

BHLX3-00-160X240-X-B-24V

TMS

Optical Information						
Part Number			BHLX3-00-160X240-X-B-24V			
LED Color		BLUE				
Wavelength	(nm)	450				
Intensity (±15%)	(Lux)	TBA	TBA	TBA		
Working Distance	(mm)	10	20	30		
Illumination (number of row)			Х			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	240				
Active Width / Inner Diameter	(mm)	160				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)		l				
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	1080				
Power Consumption	(W)	25.92				
Lighting casing temperature,						
Operating after 60 minutes	°C	°С ТВА				
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
(Constant voltage power supply)	(V)	/) Puising at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC				
			Recommended at 500DC			
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)		3240			
Max. Trigger Pulse Duration	(mcoc)	(msec) 10				
Duty Cycle	(Insec)	(msec) 10 0-10%				
buty cycle			0.10/0			
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		Attached to machine part of better heat dissipation				
CE Conformity		YES				
RoHS Compliance		YES				
Connection						
Connector Trace (Defe. 11)						
Connector Type (Default):	(JST SMR-03V				
Cable Length out from lighting :	(mm)	D:-	500 Sizeel	Cable Cala		
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2 3	N.C. LED -	WHITE		
		3	LED -	WHILE		
			August -			
Application						
Illumination Type		Backlight Illumination				
Applicattion Use		Lead frame inspection, shape recognition, size measurement				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

