


BHLX3-00-240X400-X-G-24V

Lighting Dimension



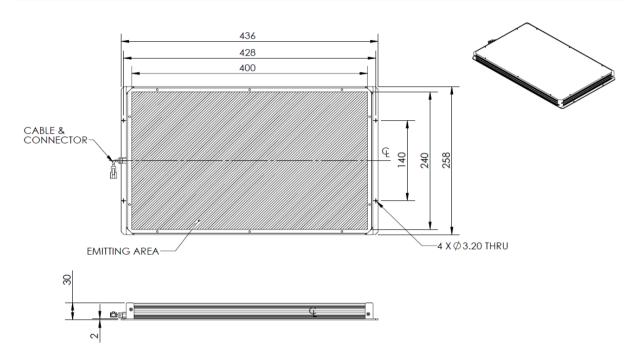

| Mechanical Information | |
|---------------------------|------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0-45°C, Humidity 20-85% |
| Weight | 1665 g |
| Length / Outer Diameter | 436 mm |
| Width / Inner Diameter | 258 mm |
| Thickness / Height | 30 mm |



BHLX3-00-240X400-X-G-24V

| Optical Information | | | | | |
|--------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------|--------------------|--|--|
| Part Number | BHLX3-00-240X400-X-G-24V | | | | |
| LED Color | GREEN | | | | |
| Wavelength | (nm) | 525 | | | |
| Intensity (±15%) | (Lux) | TBA TBA | TBA | | |
| Working Distance | (mm) | TBA TBA | TBA | | |
| Illumination (number of row) | () | X | 100 | | |
| | - | ^ | | | |
| Illumination Active Area | () | 400 | | | |
| Active Length / Outer Diameter | (mm) | 400 | | | |
| Active Width / Inner Diameter | (mm) | 240 | | | |
| Emission angle | (deg.) | 0 | | | |
| Eye Safety Class (IEC62471) | | EXEMPT | | | |
| | | | | | |
| Electrical Information | | | | | |
| Lighting Supply Voltage | | | | | |
| (constant voltage mode) | | 24V ± 2% | | | |
| Continuous Current | (mA) | 2700 | | | |
| Power Consumption | (MA) (W) | 64.8 | | | |
| | (vv) | 04.8 | | | |
| Lighting casing temperature, | | T0.4 | | | |
| Operating after 60 minutes | °C | TBA | | | |
| | | | | | |
| Strobe Mode Specification Pulse Operation | | YES | | | |
| | - | | | | |
| Max. Lighting Supply Voltage | (V) | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle | | | |
| (Constant voltage power supply) | (-/ | Recommended at 36VDC | | | |
| Pulse Current, (Max. 10msec) | (.) | 0400 | | | |
| (Constant current power supply) | (mA) | 8100 | | | |
| Max. Trigger Pulse Duration | (msec) | 10 | | | |
| Duty Cycle | (III3CC) | 0-10% | | | |
| | | | | | |
| Additional Information | | | | | |
| Additional Cooling Method | _ | Attached to machine part for better heat dissipation | | | |
| | _ | | וונ | | |
| Intensity Controller Selection | _ | ANGX, ST and SD Series | | | |
| CE Conformity | | | YES | | |
| | | YES | | | |
| RoHS Compliance | | | | | |
| | | | | | |
| Connection | | | | | |
| Connection Connector Type (Default): | | JST SMR-03V | | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V 500 | | | |
| Connection Connector Type (Default): | (mm) | JST SMR-03V | Cable Color | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V 500 | Cable Color RED | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V 500 Pin Signal | | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V 500 | RED | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V | RED | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V 500 | RED | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V 500 | RED | | |
| Connection Connector Type (Default): Cable Length out from lighting : | (mm) | JST SMR-03V 500 | RED | | |
| Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: | (mm) | JST SMR-03V 500 | RED | | |
| Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: | (mm) | ST SMR-03V 500 | RED | | |
| Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: Application Illumination Type | (mm) | JST SMR-03V 500 Pin | RED WHITE | | |
| Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration: Application | (mm) | ST SMR-03V 500 | RED WHITE | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

