


ILLUMINATOR DATA-ID

BHP1515-X-B-24V

Lighting Dimension

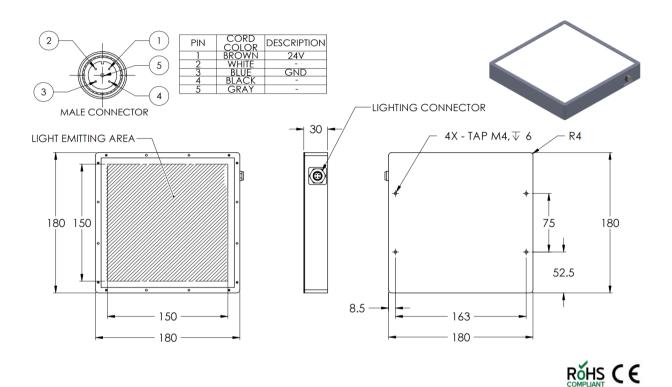

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	1000 g
Length / Outer Diameter	180 mm
Width / Inner Diameter	180 mm
Thickness / Height	30 mm



ILLUMINATOR DATA-ID

BHP1515-X-B-24V

Optical Information						
Part Number			BHP1515-X-B-24V			
LED Color						
Wavelength	(nm)		BLUE 470			
Intensity (±15%)	(Lux)	35600	32600	30100		
Working Distance	(mm)	10	20	30		
Illumination (number of row)	()		X			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	150				
Active Width / Inner Diameter	(mm)	150				
Emission angle	(deg.)		0			
Eye Safety Class (IEC62471)			II			
Electrical Information						
Electrical information						
Lighting Supply Voltage						
(constant voltage mode)			24V ± 2%			
Continuous Current	(mA)	840				
Power Consumption	(W)	(W) 20.16				
Lighting casing temperature, Operating after 60 minutes	°C		57.3			
Operating after 60 minutes	57.3					
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage	(V)	Pulsing at 24	VDC to 48VDC, 0-10% Duty Cycle, Recommend	led at 36VDC		
(Constant voltage power supply)	(v)	ruising at 24	. 20 to 40426, o 10% buty cycle, reconfinent			
Pulse Current, (Max. 10msec)	(mA)		2520			
(Constant current power supply)						
Max. Trigger Pulse Duration	(msec)		10			
Duty Cycle			0-10%			
Additional Information						
Additional Cooling Method		Δ++	ached to machine part for better heat dissipat	ion		
Intensity Controller Selection		Att	ANG, ST, SD and SDA Series	1011		
CE Conformity			YES			
RoHS Compliance	YES					
Connection						
Connector Type (default)		M12 5 PIN CONNECTOR (MALE)				
Cable Length (out from lighting)	(mm)		700			
Pin Configuration		Pin	Signal	Cable Colour		
		1	24V	BROWN		
		2	-	WHITE		
		3	GND	BLUE		
		4	-	BLACK		
	-	5	-	GRAY		
	I					
Extension Cable						
Extension Cable Connector Type (default)			M12 5 PIN CONNECTOR (FEMALE)			
Connector Type (default) Part Number Cable Length (out from female connector)	(mm)		M12 5 PIN CONNECTOR (FEMALE)			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from lighting)	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V 3000			
Connector Type (default) Part Number Cable Length (out from female connector) Extension Cable (connect to M12 5 Pin Male Connector from lighting)	(mm)		M12 5 PIN CONNECTOR (FEMALE) EXT-FL-M12F-3M-24V			



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

