


DFR4-30-050-1-R-24V

Lighting Dimension



Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	80 g
Length / Outer Diameter	56 mm
Width / Inner Diameter	12 mm
Thickness / Height	17.5 mm

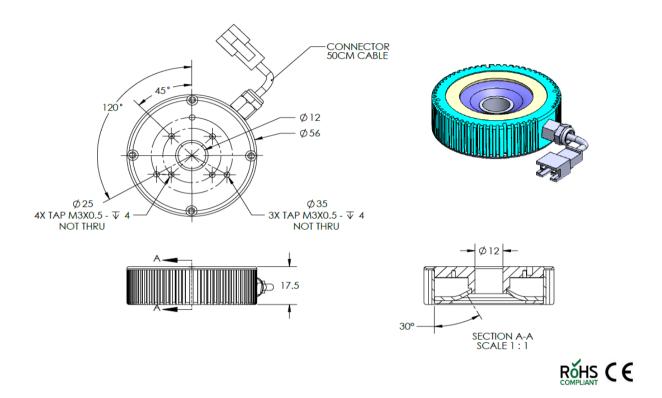


DFR4-30-050-1-R-24V

Optical Information						
Part Number	DFR4-30-050-1-R-24V					
LED Color			RED			
Wavelength	(nm)					
Intensity (±15%)	(Lux)	650 11218 9301 7682				
Working Distance	(mm)	8	12	16		
Illumination (number of row)	(111111)	8	1	10		
Illumination Active Area			1			
Active Length / Outer Diameter	(mm)		31.8			
Active Width / Inner Diameter			14			
	(mm)					
Emission angle Eye Safety Class (IEC62471)	(deg.)	(deg.) 30 EXEMPT				
-ye outer, cross (record-1)						
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	108				
Power Consumption	(W)	2.6				
Lighting casing temperature,	(**)	1177				
Operating after 60 minutes	°C	°C 47				
operating area of minutes						
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
(Constant voltage power supply)	(V)	(V) Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	(mA) 324				
Max. Trigger Pulse Duration	(msec) 10					
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection	ANG, ST, SD and SDA Series					
CE Conformity	YES					
RoHS Compliance	YES					
Connection						
Connector Type (Default):	, .	JST SMR-03V				
Cable Length out from lighting :	(mm)	<u>.</u> .	500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
	1					
Application						
Illumination Type	Diffused Illumination					
Applicattion Use	Printed character on IC chips, PCB component, printing on caps, and wafer OCR inspection.					



DFR4-30-050-1-R-24V

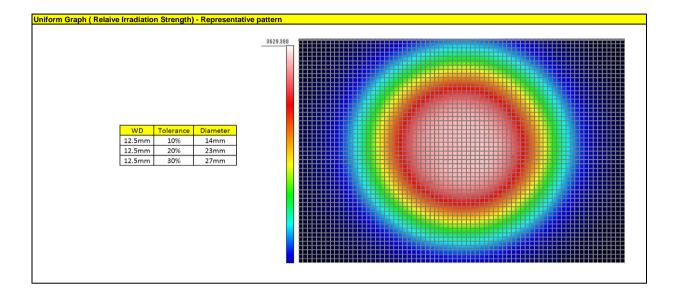



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

