



# **ILLUMINATOR DATA-ID**


### IDS5-00-100-1-G-12V

### **Lighting Dimension**



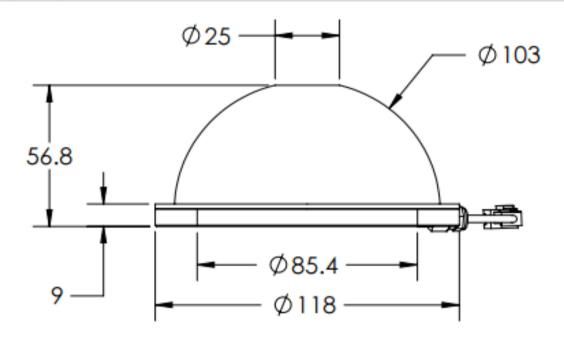

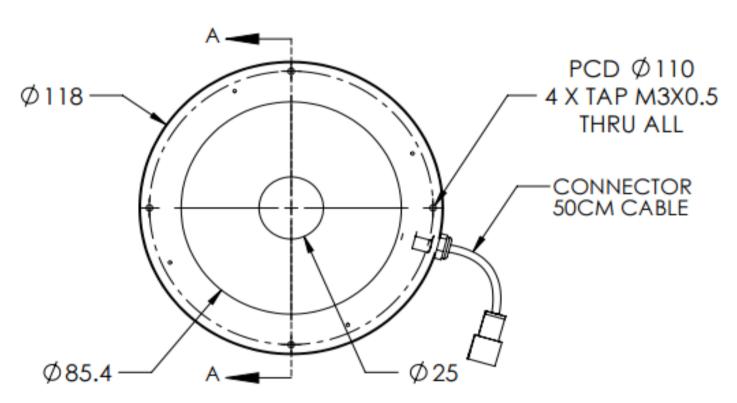

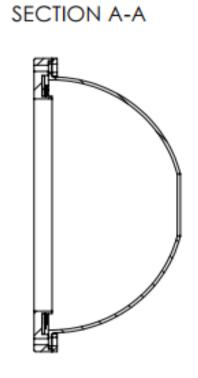



Mechanical Information				
Casing Material	Aluminium			
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%			
Weight	152 g			
Length / Outer Diameter	118 mm			
Width / Inner Diameter	25 mm			
Thickness / Height	56.8 mm			



## IDS5-00-100-1-G-12V

Optical Information							
Part Number			IDS5-00-100-1-G-12V				
LED Color			GREEN				
Wavelength	(nm)		525				
Intensity (±15%)	(Lux)	TBA	TBA	TBA			
Working Distance	(mm)	20	30	40			
	(111111)	20	•	40			
Illumination (number of row)			X				
Illumination Active Area							
Active Length / Outer Diameter	(mm)	85.4					
Active Width / Inner Diameter	(mm)		25				
Emission angle	(deg.)		0				
Eye Safety Class ( IEC62471 )		EXEMPT					
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)			12V ± 2%				
Continuous Current	(mA)		TBA				
Power Consumption	(W)		TBA				
Lighting casing temperature,	(11)						
Operating after 60 minutes	°C		TBA				
Operating arter of minutes		C   TBA					
Strobe Mode Specification							
Dulco Operation			Vec.				
Pulse Operation			YES				
Max. Lighting Supply Voltage (Constant voltage power supply)	(V)	Pulsing at 12	Pulsing at 12VDC to 24VDC, 0-10% Duty Cycle, Recommended at 18VDC				
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)		TBA				
Max. Trigger Pulse Duration	(msec)	10					
Duty Cycle	(,	0-10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANG, ST, SD and SDA Series					
CE Conformity		YES					
RoHS Compliance		YES					
ROTIS COMPILATICE	YES						
Connection							
Connector Type (Default):			JST SMR-02V				
Connector Type (Default):	(mm)		500				
Cable Length out from lighting :	(mm)	Dia.		Cabla Calar			
Pin Configuration :		Pin	Signal	Cable Color			
		1	LED +	RED			
		2	LED -	WHITE			
Application							
Illumination Type	Indirect Illumination						
Applicattion Use	Crack, chip, stains on circular or cylindrical objects, solder inspection and substract inspection.						
ripplicattion 036	Grack, Grip, Stains on Grediar or Cymranear objects, solder inspection and substract inspection.						



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



#### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

