


LLA-60-090-2-UV375-24V

Lighting Dimension



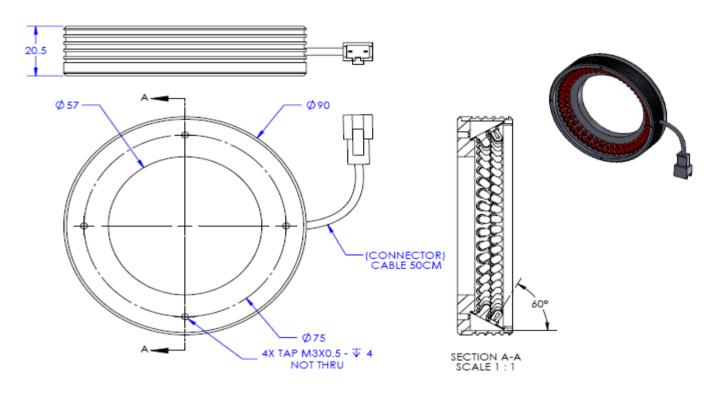

| Mechanical Information | | | |
|---------------------------|------------------------------|--|--|
| Casing Material | Aluminium | | |
| Storage Temperature Range | Temp 0-45°C, Humidity 20-85% | | |
| Weight | 114 g | | |
| Length / Outer Diameter | 90 mm | | |
| Width / Inner Diameter | 57 mm | | |
| Thinkness | 20.5 mm | | |



ILLUMINATOR DATA - ID

LLA-60-090-2-UV375-24V

| Optical Information | | | | | | |
|--|----------|--|-----------------|--------------------|--|--|
| Part Number | | LLA-60-090-2-UV375-24V | | | | |
| LED Color | | UV | | | | |
| Wavelength | (nm) | 375 | | | | |
| Intensity (±15%) | (Lux) | NA NA | | | | |
| Working Distance | (mm) | NA NA | | | | |
| Illumination (number of row) | . , | 2 | | | | |
| Illumination Active Area | | | | | | |
| Active Length / Outer Dia. | (mm) | 83 | | | | |
| Active Width / Inner Dia. | () | 57 | | | | |
| Emission angle | (deg.) | 60 | | | | |
| Eye Safety Class (IEC62471) | (1-0) | TBA | | | | |
| | | | | | | |
| Electrical Information | | | | | | |
| Lighting Supply Voltage (constant | | | | | | |
| voltage mode) | | | 24V ± 2% | | | |
| Continuous Current | (mA) | | 320 | | | |
| Power Consumption | (W) | 7.68 | | | | |
| Lighting casing temperature, Operating | (**) | 7.08 | | | | |
| after 60 minutes | °C | | 61.5 | | | |
| arter oo minutes | C | | 01.5 | | | |
| | | | | | | |
| Strobe Mode Specification | | | | | | |
| Pulse Operation | | YES | | | | |
| Max. Lighting Supply Voltage (Constant | | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle | | | | |
| voltage power supply) | (V) | Recommended at 36VDC | | | | |
| | | הבנטוווופוושפע מו 2000ר | | | | |
| Pulse Current, (Max. 10msec) (Constant current power supply) | (mA) | 960 | | | | |
| Max. Trigger Pulse Duration | (msec) | 10 | | | | |
| Duty Cycle | | 0-10% | | | | |
| | | | | | | |
| Additional Information | | | | | | |
| Additional Cooling Method | | Attached to machine part for better heat dissipation | | | | |
| Intensity Controller Selection | | ANG, ST, SD and SDA series | | | | |
| CE Conformity | | YES | | | | |
| RoHS Compliance | | YES | | | | |
| The compliance | 11.5 | | | | | |
| Connection | | | | | | |
| Connector Type (Default): | | JST SMR-03V | | | | |
| Cable Length out from lighting : | (mm) | 500 | | | | |
| Pin Configuration : | (11/111) | Pin | Signal | Cable Color | | |
| in comiguration. | | | Signal LED + | Cable Color RED | | |
| | | 1 2 | | | | |
| | | 3 | N.C. LED - | WHITE | | |
| | | 3 | LED - | WHITE | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Angliantin | | | | | | |
| Application | | | | | | |
| Illumination Type | | Direct Illumination | | | | |
| Application Use | | Edge detection, scratched on metal or glossy surface | | | | |
| eage detection, delateried on metal or group surface | | | | | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

