


## **ILLUMINATOR DATA-ID**

### LLA-75-130-3-G-24V

### **Lighting Dimension**

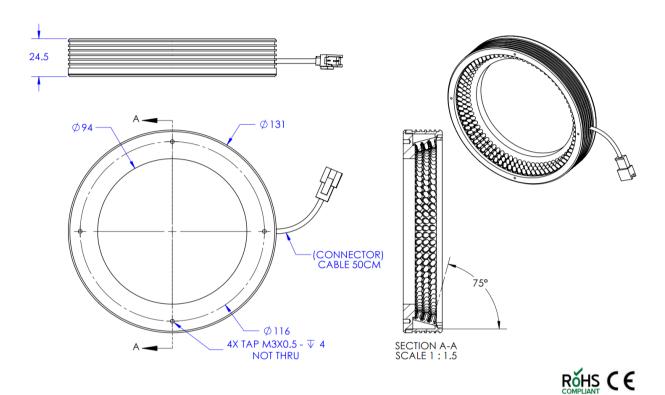

Mechanical Information			
Casing Material	Aluminium		
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%		
Weight	260 g		
Length / Outer Diameter	131 mm		
Width / Inner Diameter	94 mm		
Thickness / Height	24.5 mm		



# **ILLUMINATOR DATA-ID**

## LLA-75-130-3-G-24V

Optical Information						
Part Number			LLA-75-130-3-G-24V			
LED Color			GREEN			
Wavelength	(nm)		525			
Intensity (±15%)	(Lux)	52700 25200 40500				
Working Distance	(mm)	5	10	15		
Illumination (number of row)	()	, , ,	3			
Illumination Active Area						
Active Length / Outer Diameter	(mm)		118			
Active Width / Inner Diameter	(mm)					
Emission angle			75			
Eye Safety Class ( IEC62471 )	(ueg.)	(deg.) 75 EXEMPT				
eye surecy class ( 1200247 1 )			EXEMIT.			
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	540				
Power Consumption	(W)	12.96				
Lighting casing temperature,	(44)	1 12.90				
Operating after 60 minutes	°C	°C 51.6				
Operating arter of minutes	, c		31.0			
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage						
(Constant voltage power supply)	(V)	(V) Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	1620				
Max. Trigger Pulse Duration	(msec)	ec) 10				
Duty Cycle	(IIIsec)	(msec) 10 0-10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)		500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
Application						
Illumination Type		Direct Illumination				
Applicattion Use		Edge detection, scratched on metal or glossy surface.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

