


ILLUMINATOR DATA-ID

LLA-90-180-1-B-24V

Lighting Dimension

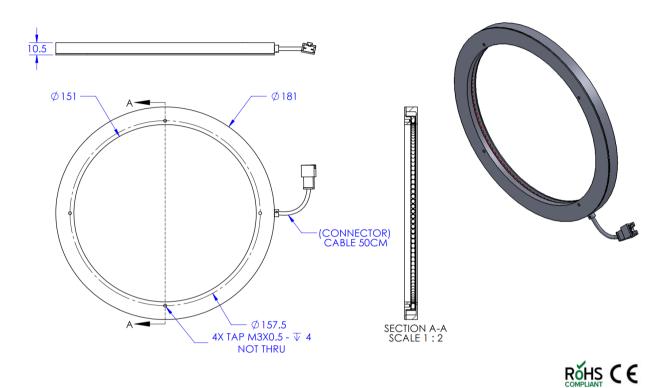

| Mechanical Information | |
|---------------------------|--------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0 - 45°C, Humidity 20-85% |
| Weight | 180 g |
| Length / Outer Diameter | 181 mm |
| Width / Inner Diameter | 151 mm |
| Thickness / Height | 10.5 mm |



ILLUMINATOR DATA-ID

LLA-90-180-1-B-24V

| Optical Information | | | | | | |
|----------------------------------|-------------|-------------------------------------------------------|-------------------------------------------------------------------|-------------|--|--|
| Part Number | | LLA-90-180-1-B-24V | | | | |
| LED Color | | | BLUE | | | |
| Wavelength | (nm) | | 470 | | | |
| Intensity (±15%) | (Lux) | 6940 | 8010 | 7420 | | |
| Working Distance | (mm) | 18 | 23 | 28 | | |
| Illumination (number of row) | () | | 1 | | | |
| Illumination Active Area | | | - | | | |
| Active Length / Outer Diameter | (mm) | | 152 | | | |
| Active Width / Inner Diameter | (mm) | 151 | | | | |
| Emission angle | (deg.) | 90 | | | | |
| Eye Safety Class (IEC62471) | (ueg.) | ueg.) 90 | | | | |
| Eye Suite, Cass (1602-772) | | | | | | |
| Electrical Information | | | | | | |
| Lighting Supply Voltage | | | | | | |
| (constant voltage mode) | | 24V ± 2% | | | | |
| Continuous Current | (mA) | 255 | | | | |
| Power Consumption | (W) | 6.12 | | | | |
| Lighting casing temperature, | | 1 0.22 | | | | |
| Operating after 60 minutes | °C | | 44.3 | | | |
| | | | | | | |
| Strobe Mode Specification | | | | | | |
| Pulse Operation | | | YES | | | |
| Max. Lighting Supply Voltage | (V) | Pulsing at 24 | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC | | | |
| (Constant voltage power supply) | (*) | ruising at 24 | VDC to 48VDC, 0-10% Duty Cycle, Neconiniend | ed at 30VDC | | |
| Pulse Current, (Max. 10msec) | / · · · ^ · | 700 | | | | |
| (Constant current power supply) | (mA) | 765 | | | | |
| Max. Trigger Pulse Duration | (msec) | 10 | | | | |
| Duty Cycle | (| 0-10% | | | | |
| Additional Information | | | | | | |
| | | | | | | |
| Additional Cooling Method | | Attached to machine part for better heat dissipation | | | | |
| Intensity Controller Selection | | ANG, ST, SD and SDA Series | | | | |
| CE Conformity | | YES | | | | |
| RoHS Compliance | YES | | | | | |
| Connection | | | | | | |
| Connector Type (Default): | | JST SMR-03V | | | | |
| Cable Length out from lighting : | (| JS1 SMR-03V 500 | | | | |
| Pin Configuration : | (mm) | Pin | | Cable Color | | |
| rin comiguration . | - | Pin 1 | Signal LED + | RED | | |
| | - | | N.C. | NED | | |
| | <u> </u> | 2 | | | | |
| | | 3 | LED - | WHITE | | |
| | | | | | | |
| | | | | | | |
| Application | | | | | | |
| Illumination Type | | Direct Illumination | | | | |
| Applicattion Use | | Edge detection, scratched on metal or glossy surface. | | | | |
| | | | | | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

