


## **ILLUMINATOR DATA-ID**

### LLA-90-210-1-R-24V

### **Lighting Dimension**

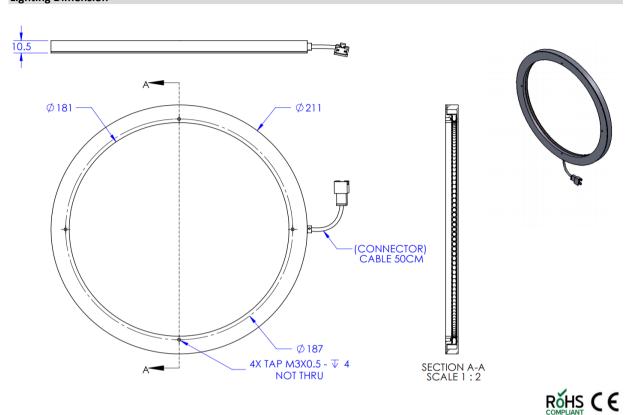

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	190 g
Length / Outer Diameter	211 mm
Width / Inner Diameter	181 mm
Thickness / Height	10.5 mm



# **ILLUMINATOR DATA-ID**

## LLA-90-210-1-R-24V

Optical Information							
Part Number	T		LLA-90-210-1-R-24V				
LED Color			RED				
Wavelength	(nm)	630					
Intensity (±15%)	(Lux)	1640 1790 1610					
Working Distance	(mm)	21	26	31			
Illumination (number of row)	()	21	1	31			
Illumination Active Area	1		<u> </u>				
Active Length / Outer Diameter	(mm)	182					
Active Width / Inner Diameter	(mm)	181					
Emission angle	(deg.)		90				
Eye Safety Class ( IEC62471 )	(ueg.)		EXEMPT				
Lyc surely state ( needs to 2 )			LALLAN T				
Electrical Information							
Lighting Supply Voltage	T						
(constant voltage mode)			24V ± 2%				
Continuous Current	(mA)	240					
Power Consumption	(W)		5.76				
Lighting casing temperature,	, .,	5.10					
Operating after 60 minutes	°C		45.5				
Strobe Mode Specification							
Pulse Operation		YES					
Max. Lighting Supply Voltage	0.0						
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC					
Pulse Current, (Max. 10msec)							
(Constant current power supply)	(mA)	720					
Max. Trigger Pulse Duration	(msec)	10					
Duty Cycle	(III3ec)	0-10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANG, ST, SD and SDA Series					
CE Conformity		YES					
RoHS Compliance	YES						
Connection							
Connector Type (Default):	I	JST SMR-03V					
Cable Length out from lighting :	(mm)	500					
Pin Configuration :	()	Pin	Signal	Cable Color			
==gu.uu.u		1	LED+	RED			
		2	N.C.				
	<u> </u>	3	LED -	WHITE			
Application							
Illumination Type		Direct Illumination					
		Edge detection, scratched on metal or glossy surface.					
Applicattion Use			Euge detection, scratched of filetar or glossy surface.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

