


ILLUMINATOR DATA-ID

LSQ-45-040-1-B-24V

Lighting Dimension



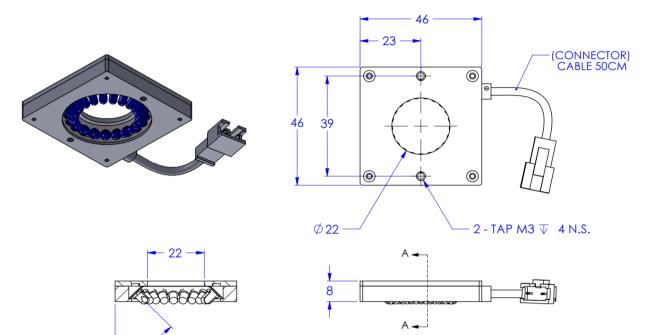

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	40 g
Length / Outer Diameter	46 mm
Width / Inner Diameter	22 mm
Thickness / Height	8 mm



ILLUMINATOR DATA-ID

LSQ-45-040-1-B-24V

Optical Information						
Part Number			LSQ-45-040-1-B-24V			
LED Color		BLUE				
Wavelength	(nm)	470				
Intensity (±15%)	(Lux)	163016 150236 103944				
Working Distance	(mm)	7	12	17		
Illumination (number of row)	(11111)	· · · · · · · · · · · · · · · · · · ·	1	17		
Illumination Active Area			1			
Active Length / Outer Diameter	(mm)	34				
			22			
Active Width / Inner Diameter	(mm)	45				
Emission angle	(deg.)					
Eye Safety Class (IEC62471)			II .			
Electrical Information						
Linksing County Valence						
Lighting Supply Voltage			24/ + 20/			
(constant voltage mode)	4 41	24V ± 2%				
Continuous Current	(mA)		45			
Power Consumption	(W)		1.08			
Lighting casing temperature,						
Operating after 60 minutes	°C		51.8			
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage	4.0			20.00		
(Constant voltage power supply)	(V)	Pulsing at 24	IVDC to 48VDC, 0-10% Duty Cycle, Recommended at	36VDC		
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)		135			
Max. Trigger Pulse Duration	(10			
Duty Cycle	(msec)		0-10%			
Additional Information						
Additional Cooling Method		At	tached to machine part for better heat dissipation			
		ANG, ST, SD and SDA Series				
Intensity Controller Selection			ANG, ST, SD and SDA Series			
			ANG, ST, SD and SDA Series YES			
Intensity Controller Selection						
Intensity Controller Selection CE Conformity			YES			
Intensity Controller Selection CE Conformity ROHS Compliance Connection			YES YES			
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default):			YES YES JST SMR-03V			
Intensity Controller Selection CE Conformity ROHS Compliance Connection	(mm)		YES YES			
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default):	(mm)	Pin	YES YES JST SMR-03V	Cable Color		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	Pin 1	YES YES JST SMR-03V 500	Cable Color RED		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)		YES YES JST SMR-03V 500 Signal			
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	1	YES YES JST SMR-03V 500 Signal LED+	RED		
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	1 2	YES YES YES JST SMR-03V 500 Signal LED + N.C.	RED 		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	1 2	YES YES YES JST SMR-03V 500 Signal LED + N.C.	RED 		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	1 2	YES YES YES JST SMR-03V 500 Signal LED + N.C.	RED 		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	1 2	YES YES YES JST SMR-03V 500 Signal LED + N.C.	RED 		



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

