




ILLUMINATOR DATA-ID

LSQ-45-040-1-G-24V

Lighting Dimension

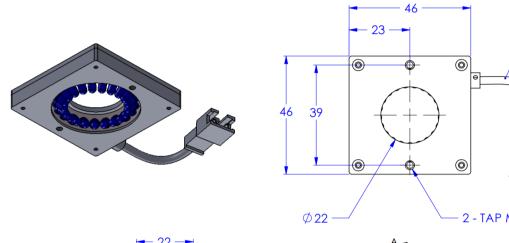



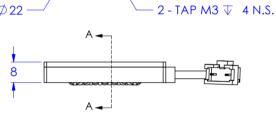



(CONNECTOR) CABLE 50CM

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	40 g
Length / Outer Diameter	46 mm
Width / Inner Diameter	22 mm
Thickness / Height	8 mm



LSQ-45-040-1-G-24V

Optical Information						
Part Number	1		LSQ-45-040-1-G-24V			
LED Color			GREEN			
Wavelength	(nm)		525			
Intensity (±15%)	(Lux)	67450	66030	46718		
Working Distance	(mm)	7	12	17		
Illumination (number of row)	()	•	1	±/		
Illumination Active Area						
Active Length / Outer Diameter	(mm)	34				
Active Width / Inner Diameter	(mm)	22				
Emission angle	(deg.)	45				
Eye Safety Class (IEC62471)	(==8.7	EXEMPT				
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	45				
Power Consumption	(W)	1.08				
Lighting casing temperature,		00				
Operating after 60 minutes	°C	56.8				
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage	// //					
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	135				
Max. Trigger Pulse Duration	(msec)		10			
Duty Cycle	,,	0-10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance		YES				
Connection						
Connector Type (Default):		ICT CAAD OOM				
Connector Type (Default): Cable Length out from lighting :	(mm)	JST SMR-03V 500				
Pin Configuration :	(111111)	Pin		Cable Color		
riii comiguration .	-	1	Signal LED +	RED		
	 	2	N.C.			
	 	3	N.C. LED -	WHITE		
	-	3	LEU -	WILL		
Application						
Illumination Type		Direct Illumination				
Applicattion Use		Substrate inspection, label inspection, flat surface, fiducially recognition.				
		Substrate inspection, label inspection, flat surface, floucially recognition.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

