


IDQ3-00-120-1-R-24V

Lighting Dimension



Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	1472g
Length / Outer Diameter	240mm
Width / Inner Diameter	218mm
Thickness / Height	126.2mm

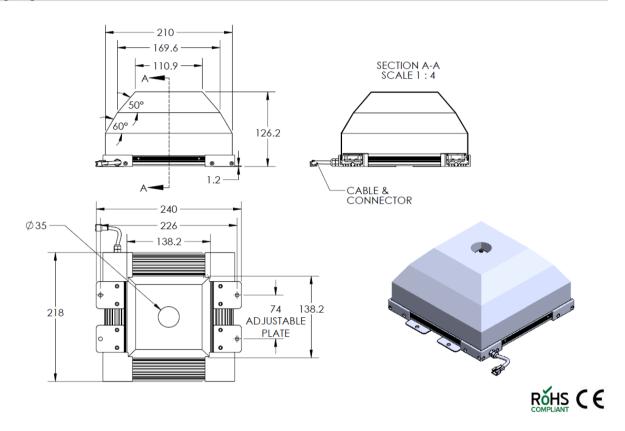

IDQ3-00-120-1-R-24V

Optical Information						
Part Number			IDQ3-00-120-1-R-24V			
LED Color			RED			
Wavelength	(nm)		620			
Intensity (±15%)	(Lux)	TBA TBA TBA				
Working Distance	(mm)	40	50	60		
Illumination (number of row)	(•	1			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	138.2				
Active Width / Inner Diameter	(mm)	35				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)	11-07	EXEMPT				
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V + 2%				
Continuous Current	(mA)	24V ± 2% 720				
Power Consumption	(W)	17.28				
Lighting casing temperature,	(**)					
Operating after 60 minutes	°C	TBA				
operating after 60 minutes						
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
(Constant voltage power supply)	(V)	Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	2160				
Max. Trigger Pulse Duration	(msec)	ec) 10				
Duty Cycle	(msec) 10 0-10%					
Duty Cycle			0.10%			
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		Attached to machine part for better neat dissipation ANG, ST, SD and SDA Series				
CE Conformity		ANG, S1, SU and SUA Series YES				
RoHS Compliance		YES				
Notis compilance		YES				
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	500				
Pin Configuration :	\	Pin	Signal	Cable Color		
coiigurution .		1	LED +	RED		
		2	N.C.			
	-	3	LED -	WHITE		
		3	LEU -	WILL		
Application						
Illumination Tune		Indirect Illumination				
Illumination Type Applicattion Use		Indirect Illumination				
	Crack, chip, stains and mark on edge of square or rectangular object					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

