


ILLUMINATOR DATA-ID

LBL3-00-300-X-B-24V

Lighting Dimension



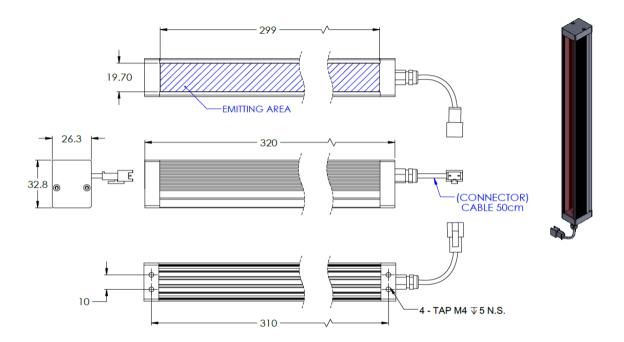

Mechanical Information				
Casing Material	Aluminium			
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%			
Weight	340 g			
Length / Outer Diameter	320 mm			
Width / Inner Diameter	26.3 mm			
Thickness / Height	32.8 mm			



ILLUMINATOR DATA-ID

LBL3-00-300-X-B-24V

Optical Information						
Part Number			LBL3-00-300-X-B-24V			
LED Color			BLUE			
Wavelength	(nm)		450			
Intensity (±15%)	(Lux)	TBA	TBA	TBA		
Working Distance	(mm)	10	20	30		
Illumination (number of row)			X			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	299				
Active Width / Inner Diameter	(mm)	19.7				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)	11.07	(deg.)				
	1					
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)			24V ± 2%			
Continuous Current	(mA)	450				
Power Consumption	(W)	10.8				
Lighting casing temperature,	(**)		10.8			
Operating after 60 minutes	°C	The				
Operating after 60 minutes	C	°C TBA				
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage	0.0		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle			
(Constant voltage power supply)	(V)		Recommended at 36VDC			
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)		1350			
Max. Trigger Pulse Duration	(mcoc)	10				
Duty Cycle	(msec)	msec) 10				
buty dysic	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST , SD and SDA Series				
CE Conformity	YES					
RoHS Compliance	YES					
NOTS compliance	TES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	500				
Pin Configuration :	,,	Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	N.C. LED -	WHITE		
	-	3	LED -	WHILE		
	1 1					
	<u> </u>					
Application						
Illumination Type	Direct Illumination					
Applicattion Use	General illumination, label inspection, character inspection, code recognition.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

