


LBL3-00-300-X-R-24V

Lighting Dimension



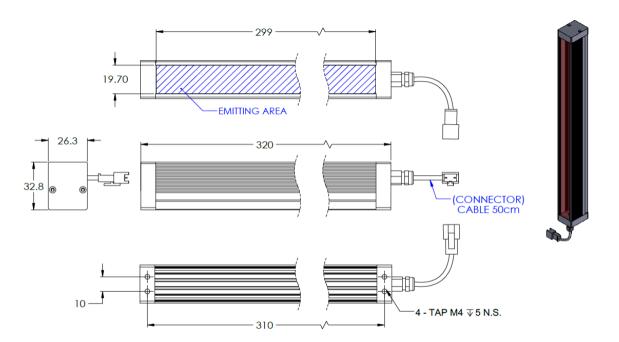

| Mechanical Information | |
|---------------------------|------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0-45°C, Humidity 20-85% |
| Weight | 340 g |
| Length / Outer Diameter | 320 mm |
| Width / Inner Diameter | 26.3 mm |
| Thickness / Height | 32.8 mm |



LBL3-00-300-X-R-24V

| Optical Information | | | | | | |
|----------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|--------|-------------|--|--|
| Part Number | | LBL3-00-300-X-R-24V | | | | |
| LED Color | | | RED | | | |
| Wavelength | (nm) | | | | | |
| Intensity (±15%) | (Lux) | 630 11880 8160 5976 | | | | |
| Working Distance | (mm) | 10 | 20 | 30 | | |
| Illumination (number of row) | (111111) | 10 | X | 30 | | |
| Illumination Active Area | | | ^ | | | |
| Active Length / Outer Diameter | (mm) | | 299 | | | |
| Active Width / Inner Diameter | | | 19.7 | | | |
| | (mm) | | | | | |
| Emission angle Eye Safety Class (IEC62471) | (deg.) | (deg.) 0 EXEMPT | | | | |
| ye Jaiety Class (ILCO2471) | | | | | | |
| Electrical Information | | | | | | |
| Lighting Supply Voltage | | | | | | |
| (constant voltage mode) | | 24V ± 2% | | | | |
| Continuous Current | (mA) | 270 | | | | |
| Power Consumption | (W) | 6.48 | | | | |
| Lighting casing temperature, | (**) | 0.40 | | | | |
| Operating after 60 minutes | °C | °C 46.3 | | | | |
| | | | | | | |
| Strobe Mode Specification | | | | | | |
| Pulse Operation | | YES | | | | |
| Max. Lighting Supply Voltage | (V) | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle | | | | |
| (Constant voltage power supply) | (v) | Recommended at 36VDC | | | | |
| Pulse Current, (Max. 10msec) | (mA) | mA) 810 | | | | |
| (Constant current power supply) | | | | | | |
| Max. Trigger Pulse Duration Duty Cycle | (msec) 10 0-10% | | | | | |
| out, eyere | | | 0.10% | | | |
| Additional Information | | | | | | |
| Additional Cooling Method | | Attached to machine part for better heat dissipation | | | | |
| Intensity Controller Selection | ANG, ST , SD and SDA Series | | | | | |
| CE Conformity | YES | | | | | |
| RoHS Compliance | YES | | | | | |
| | | | | | | |
| Connection | | | | | | |
| Connector Type (Default): | | JST SMR-03V | | | | |
| Cable Length out from lighting : | (mm) | | 500 | | | |
| Pin Configuration : | | Pin | Signal | Cable Color | | |
| | | 1 | LED + | RED | | |
| | | 2 | N.C. | | | |
| | | 3 | LED - | WHITE | | |
| | | | | | | |
| | | | | | | |
| Application | | | | | | |
| Illumination Type | Direct Illumination | | | | | |
| Applicattion Use | | General illumination, label inspection, character inspection, code recognition. | | | | |
| | denotes manimisation, rader inspectation, situation inspectation, code recognition. | | | | | |



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

