


## LBL3-00-700-3-R-24V

## **Lighting Dimension**



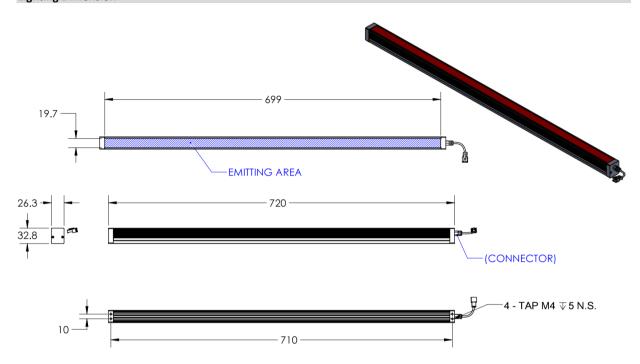

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	720 g
Length / Outer Diameter	720 mm
Width / Inner Diameter	26.3 mm
Thickness / Height	32.8 mm



## LBL3-00-700-3-R-24V

Part Number LED Color Wavelength Intensity (±15%) Working Distance Illumination (number of row) Illumination Active Area Active Length / Outer Diameter	(nm) (Lux) (mm)	10	LBL3-00-700-3-R-24V RED 630	30		
LED Color Wavelength Intensity (±15%) Working Distance Illumination (number of row) Illumination Active Area Active Length / Outer Diameter	(Lux)	10	RED 630	20		
Wavelength Intensity (±15%) Working Distance Illumination (number of row) Illumination Active Area Active Length / Outer Diameter	(Lux)	10	630	20		
Intensity (±15%) Working Distance Illumination (number of row) Illumination Active Area Active Length / Outer Diameter	(Lux)	10		20		
Working Distance Illumination (number of row) Illumination Active Area Active Length / Outer Diameter		10	20	20		
Illumination (number of row) Illumination Active Area Active Length / Outer Diameter	()					
Illumination Active Area Active Length / Outer Diameter			3			
Active Length / Outer Diameter						
	(mm)	699				
Active Width / Inner Diameter	(mm)	19.7				
Emission angle	(deg.)	0				
Eye Safety Class ( IEC62471 )	V==07	EXEMPT				
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	630				
Power Consumption	(W)	15.12				
Lighting casing temperature,	°C					
Operating after 60 minutes	Ü					
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage			163			
(Constant voltage power supply)	(V)	Pulsing at 24	VDC to 48VDC, 0-10% Duty Cycle, Recommend	led at 36VDC		
Pulse Current, (Max. 10msec)	(mA)	1890				
(Constant current power supply)	()					
Max. Trigger Pulse Duration	(msec)					
Duty Cycle			0-10%			
Additional Information						
Addition of Conflict Adults of		Attached to problem and for heaten host discipation				
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, SD, ST & SDA Series				
CE Conformity		YES				
RoHS Compliance		YES				
Connection						
			JST SMR-03V			
Connector Type (Default):	(mm)	JST SMR-03V 500				
Cable Length out from lighting :	(mm)	Di-		Cable Calar		
Pin Configuration :		Pin 1	Signal LED +	Cable Color RED		
	-	2	N.C.			
	<u> </u>		N.C. LED -	WHITE		
		3	LED -	WHITE		
			100			
Application						
Application  Illumination Type Applicattion Use			Direct Illumination label inspection, character inspection, code re			



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

