
ILLUMINATOR DATA-ID

LBL3-00-800-X-R-24V

TMS

Lighting Dimension

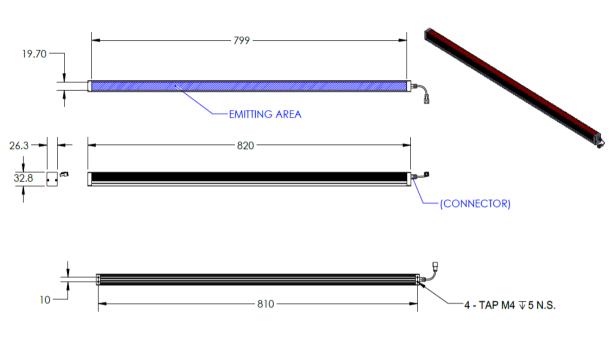

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	780 g
Length / Outer Diameter	820 mm
Width / Inner Diameter	26.3 mm
Thickness / Height	32.8 mm

ILLUMINATOR DATA-ID

LBL3-00-800-X-R-24V

TMS

Optical Information LBL3-00-800-X-R-24V Part Number LBL3-00-800-X-R-24V LED Color RED Wavelength (nm) Intensity (±15%) (Lux) Working Distance (mm) Illumination (number of row) X Illumination (number of row) X Illumination Active Area 799 Active Length / Outer Diameter (mm) Active Width / Inner Diameter (mm) Illumination angle 0 Eye Safety Class (IEC62471) EXEMPT	TBA	
LED Color RED Wavelength (nm) 630 Intensity (±15%) (Lux) TBA TBA Working Distance (mm) 10 20 Illumination (number of row) 10 X 11 Active Length / Outer Diameter (mm) 799 799 Active Width / Inner Diameter (mm) 19.7 19.7 Emission angle (deg.) 0 0		
Wavelength (nm) 630 Intensity (±15%) (Lux) TBA TBA Working Distance (mm) 10 20 Illumination (number of row) 10 20 Illumination Active Area X X Illumination Active Area 799 Active Length / Outer Diameter (mm) 19.7 Emission angle (deg.) 0		
Intensity (±15%) (Lux) TBA TBA Working Distance (mm) 10 20 Illumination (number of row) X Illumination Active Area Illumination Active Area 799 Active Length / Outer Diameter 799 Active Width / Inner Diameter (mm) 19.7 19.7 Emission angle (deg.) 0 0		
Working Distance (mm) 10 20 Illumination (number of row) I X Illumination Active Area Y Active Length / Outer Diameter (mm) 799 Active Width / Inner Diameter (mm) 19.7 Emission angle (deg.) 0		
Illumination (number of row) X Illumination Active Area X Active Length / Outer Diameter (mm) Active Width / Inner Diameter (mm) Emission angle (deg.)	30	
Illumination Active Area		
Active Length / Outer Diameter (mm) 799 Active Width / Inner Diameter (mm) 19.7 Emission angle (deg.) 0		
Active Width / Inner Diameter (mm) 19.7 Emission angle (deg.) 0		
Emission angle (deg.) 0		
Eye Safety Class (IEC62471) EXEMPT		
Electrical Information		
Lighting Supply Voltage		
(constant voltage mode) 24V ± 2%		
Continuous Current (mA) 720		
Power Consumption (W) 17.28		
Lighting casing temperature,		
Operating after 60 minutes °C TBA		
Strobe Mode Specification		
Pulse Operation YES		
Max Lighting Supply Voltage	rle	
(V) Recommended at 36VDC		
Pulse Current (May 10mcoc)		
(Constant current power supply) (mA) 2160		
Max. Trigger Pulse Duration (msec) 10		
	0-10%	
Additional Information		
Additional Cooling Method Attached to machine part for better heat dissip	pation	
Intensity Controller Selection ANG, ST , SD and SDA Series		
	YES	
	YES	
Connection		
Connector Type (Default): JST SMR-03V		
Cable Length out from lighting : (mm) 500		
Pin Configuration : Pin Signal	Cable Color	
1 LED +	RED	
2N.C.		
3 LED -	WHITE	
Application		
Illumination Type Backlight Illumination	Backlight Illumination	
Applicattion Use Lead frame inspection, shape recognition, size measuren	Lead frame inspection, shape recognition, size measurement.	



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

