


LBM-00-080-2-R-24V



Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	27 g
Length / Outer Diameter	92 mm
Width / Inner Diameter	13 mm
Thickness / Height	9.1 mm

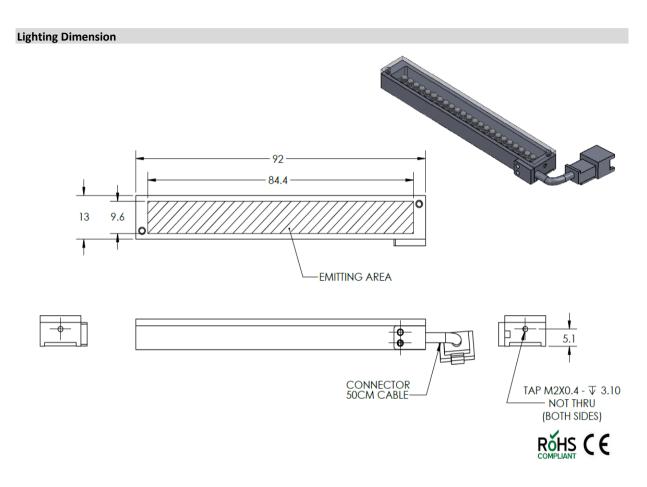

LBM-00-080-2-R-24V

LBM-00-080-2-R-24V				
	RED			
(nm)	630			
(Lux)	11700	8500	6100	
(mm)	10	20	30	
		2		
(mm)				
(mm)	9.6			
(deg.)	0			
EXEMPT				
	24V ± 2%			
(mA)	52			
(W)	1.248			
	777			
°C		52.6		
	YES			
0.0	1	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle		
(V)	Recommended at 36VDC			
4 -1		AFC		
(mA)	156			
(msec)	sec) 10			
T	Attached to machine part for better heat dissipation			
	ANG, SD, ST & SDA series			
YES				
YES				
	JST SMR-03V			
(mm)		500		
	Pin	Signal	Cable Color	
	1	LED +	RED	
	2	N.C.		
	3	LED -	WHITE	
		Direct Illumination		
	(mm) (mm) (deg.) (mA) (W) °C (V) (mA) (msec)	(Lux) 11700 (mm) 10 (mm) (mm) (mm) (deg.) (MA) (W) (MA) (msec) (m	RED	



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

