


Lighting Dimension

١



Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	168 g
Length / Outer Diameter	89 mm
Width / Inner Diameter	89 mm
Thickness / Height	18.7 mm

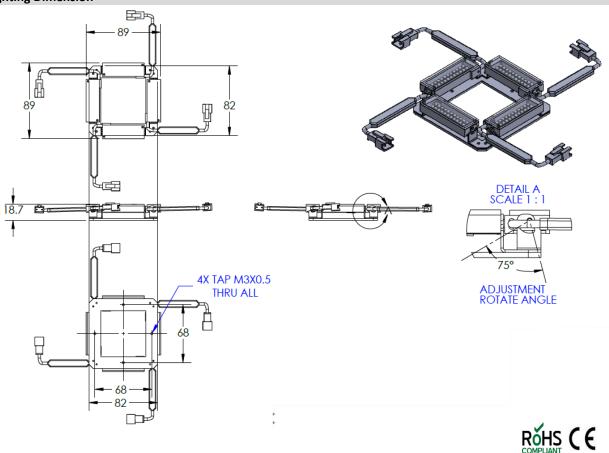

LBMQ-00-040-3-B-24V

Optical Information						
Part Number	_		LBMQ-00-040-3-B-24V			
ED Color		BLUE				
Wavelength	(nm)		470			
	(nm)	TDA		TDA		
ntensity (±15) Working Distance	(Lux)	TBA 10	TBA	TBA 30		
-	(mm)	10	20	30		
llumination (number of row)			3			
Ilumination Active Area						
Active Length / Outer Dia.	(mm)	50				
Active Width / Inner Dia.	(mm)	9.1				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)						
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)			24V ± 2%			
	(A)					
Continuous Current	(mA)	360				
Power Consumption	(W)		8.64			
Lighting casing temperature, Operating after 60 minutes	°C		50.6			
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage	0.0		Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle			
(Constant voltage power supply)	(∨)		Recommended at 36VDC			
Pulse Current, (Max. 10msec)						
	(mA)	1080				
(Constant current power supply)	(10)	40				
Max. Trigger Pulse Duration Duty Cycle	(msec)		10 0-10%			
Duty cyclc			0 10/0			
Additional Information						
			Attached to machine part for better heat dissipat	on		
Additional Cooling Method			Attached to machine part for better heat dissipat ANGX. SD. ST & SDA series	on		
Additional Cooling Method Intensity Controller Selection			ANGX, SD, ST & SDA series	on		
Additional Cooling Method Intensity Controller Selection CE Conformity			ANGX, SD, ST & SDA series YES	on		
Additional Cooling Method			ANGX, SD, ST & SDA series	on		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance			ANGX, SD, ST & SDA series YES	ion		
Additional Cooling Method ntensity Controller Selection EE Conformity RoHS Compliance			ANGX, SD, ST & SDA series YES YES	ion		
Additional Cooling Method Intensity Controller Selection E Conformity RoHS Compliance			ANGX, SD, ST & SDA series YES YES JST SMR-03V	on		
Additional Cooling Method Tensity Controller Selection E Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)		ANGX, SD, ST & SDA series YES YES JST SMR-03V 500			
Additional Cooling Method Tensity Controller Selection E Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	Pin	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal	Cable Color		
Additional Cooling Method Tensity Controller Selection E Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	Pin 1	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED +	Cable Color RED		
Additional Cooling Method Additional Cooling Method Teconformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Tensity Controller Selection E Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)		ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED +	Cable Color RED		
Additional Cooling Method Additional Cooling Method Teconformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting : Pin Configuration :		1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		
Additional Cooling Method Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting :	(mm)	1 2	ANGX, SD, ST & SDA series YES YES JST SMR-03V 500 Signal LED + N.C.	Cable Color RED		



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

