
LBRQ-00-040-6-IR850-24V

Lighting Dimension

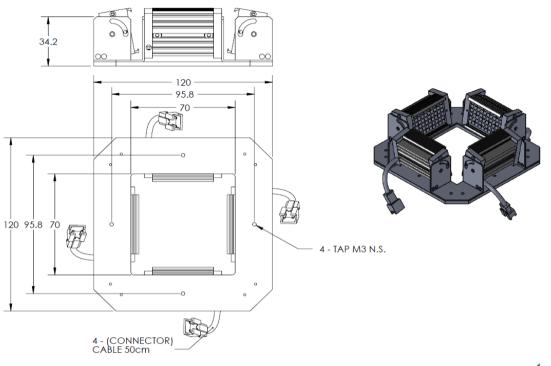

ROHS CE

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	355
Length / Outer Diameter	120
Width / Inner Diameter	70
Thickness / Height	34.2

ILLUMINATOR DATA-ID

LBRQ-00-040-6-IR850-24V

TMS

Optical Information						
Part Number			LBRQ-00-040-6-IR850-24V			
LED Color			IR			
Wavelength	(nm)					
Intensity (±15%)	(Lux)		NA			
Working Distance	(mm)	NA				
Illumination (number of row)		6				
Illumination Active Area						
Active Length / Outer Diameter	(mm)	m) 120				
Active Width / Inner Diameter	(mm)	60				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)		EXEMPT				
Electrical Information						
Liebbieg Currely Velkers						
Lighting Supply Voltage			24// + 2%			
(constant voltage mode)	(A)	24V ± 2%				
Continuous Current	(mA)	288				
Power Consumption Lighting casing temperature,	(W)	6.91				
Operating fasting temperature,	°c	ТВА				
operating arter of minutes	L L	°С — — — — — — — — — — — — — — — — — — —				
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage	(∨)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle				
(Constant voltage power supply)		Recommended at 36VDC				
Pulse Current, (Max. 10msec)	(mA)	864				
(Constant current power supply)						
Max. Trigger Pulse Duration	(msec)	(msec) 10				
Duty Cycle			0-10%			
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		Attached to machine part for better heat dissipation				
CE Conformity						
RoHS Compliance		YES				
			115			
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)		500			
Pin Configuration :	(1111)	Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
		5		winth		
A						
Application		D. Illumination				
Illumination Type		IR Illumination General illumination, label inspection, character illumination, code recognition				
Applicattion Use		General munimation, label inspection, character munimation, code recognition				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@visionconsultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com Scan me to visit machine-vision-shop

