


LBRQ-00-160-3-R-24V

Lighting Dimension



Mechanical Information	
Casing Material	Aluminium
easing material	Addition
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	740 g
Length / Outer Diameter	240 mm
Length / Outer Diameter	270 111111
Width / Inner Diameter	190 mm
Thickness / Height	34.2 mm

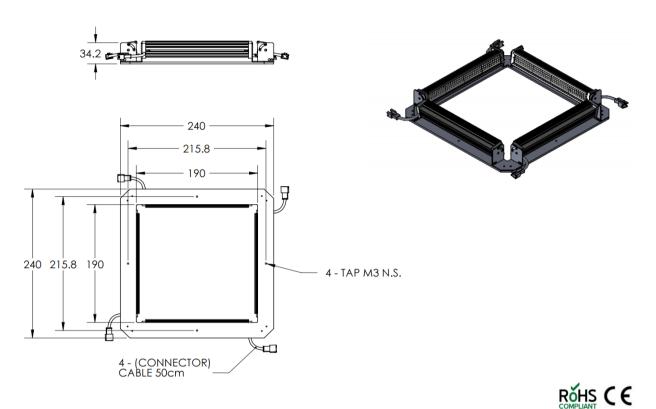

LBRQ-00-160-3-R-24V

Optical Information						
Part Number		LBRQ-00-160-3-R-24V				
LED Color			RED			
Wavelength	(nm)		630			
Intensity (±15%)		TBA	TBA	TBA		
	(Lux)					
Working Distance	(mm)	280	291	302		
Illumination (number of row)			3			
Illumination Active Area	, ,					
Active Length / Outer Diameter	(mm)		240			
Active Width / Inner Diameter	(mm)	190				
Emission angle	(deg.)	(deg.) 0				
Eye Safety Class (IEC62471)	fety Class (IEC62471) EXEMPT					
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)		528			
Power Consumption	(W)	12.67				
Lighting casing temperature,						
Operating after 60 minutes	°C	°C 35.4				
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage	0.0	D. Live and Alline and				
(Constant voltage power supply)	(V)	(V) Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)						
(Constant current power supply)	(mA)	(mA) 1584				
Max. Trigger Pulse Duration	(mser)	(msec) 10				
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity	YES					
RoHS Compliance	YES					
·						
Connection						
Connector Type (Default):			JST SMR-03V			
Cable Length out from lighting :	(mm)		500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED+	RED		
		2	N.C.			
		3	LED -	WHITE		
		-				
	1					
Application						
Illumination Type	Direct Illumination					
Applicattion Use	General illumination, label inspection, character inspection, code recognition.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

