


LBRX-00-160-1-UV-24V

Lighting Dimension



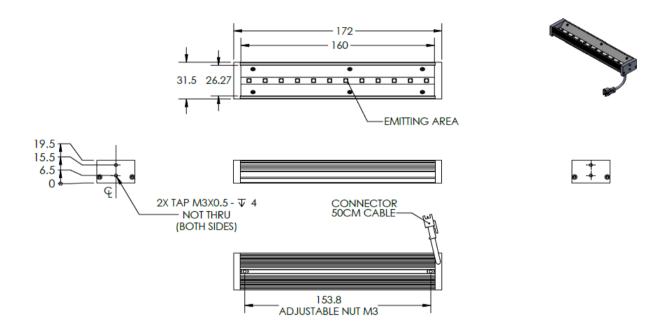

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	155 g
Length / Outer Diameter	172 mm
Width / Inner Diameter	31.5 mm
Thickness / Height	19.5 mm



LBRX-00-160-1-UV-24V

Optical Information				
Part Number	LBRX-00-160-1-UV-24V			
LED Color		UV		
Wavelength	(nm)	nm) 365		
Intensity (±15%)	(Lux)	NA NA		
Working Distance	(mm)			
Illumination (number of row)	, ,	1		
Illumination Active Area				
Active Length / Outer Diameter	(mm)	160		
Active Width / Inner Diameter	(mm)	26.27		
Emission angle	(deg.)	0		
Eye Safety Class (IEC62471)	(4.58.)	TBA		
	•			
Electrical Information				
Lighting Supply Voltage				
(constant voltage mode)		24V ± 2%		
Continuous Current	(mA)	200		
Power Consumption	(W)			
Lighting casing temperature,	***/			
Operating after 60 minutes	°C	58.5		
Strobe Mode Specification				
Pulse Operation		YES		
Max. Lighting Supply Voltage				
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended	at 36VDC	
Pulse Current, (Max. 10msec)				
	(mA)	600		
(Constant current power supply)	()	40		
Max. Trigger Pulse Duration	(msec)	10		
Duty Cycle		0-10%		
Additional Information				
Additional Cooling Method		Attached to machine part for better heat dissipation	١	
Intensity Controller Selection		ANG, ST, SD and SDA Series		
CE Conformity		YES		
RoHS Compliance		YES		
Notis compilative		123		
Connection				
Connector Type (Default):		JST SMR-03V		
Connector Type (Default): Cable Length out from lighting :	(mm)	500		
Connector Type (Default):	(mm)	500 Pin Signal	Cable Color	
Connector Type (Default): Cable Length out from lighting :	(mm)	500 Pin Signal 1 LED +	RED	
Connector Type (Default): Cable Length out from lighting :	(mm)	500 Pin Signal 1 LED + 2 N.C.	RED 	
Connector Type (Default): Cable Length out from lighting :	(mm)	500 Pin Signal 1 LED +	RED	
Connector Type (Default): Cable Length out from lighting :	(mm)	500 Pin Signal 1 LED + 2 N.C.	RED 	
Connector Type (Default): Cable Length out from lighting :	(mm)	500 Pin Signal 1 LED + 2 N.C.	RED 	
Connector Type (Default): Cable Length out from lighting :	(mm)	500 Pin Signal 1 LED + 2 N.C.	RED 	
Connector Type (Default): Cable Length out from lighting :	(mm)	500 Pin Signal 1 LED + 2 N.C.	RED 	
Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	500 Pin Signal 1 LED + 2 N.C.	RED 	
Connector Type (Default): Cable Length out from lighting : Pin Configuration : Application	(mm)	S00 Signal 1	RED 	
Connector Type (Default): Cable Length out from lighting : Pin Configuration : Application Illumination Type	(mm)	Signal LED +	RED WHITE	
Connector Type (Default): Cable Length out from lighting : Pin Configuration : Application	(mm)	S00 Signal 1	RED WHITE	



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

