


LBRX-00-160-3-G-24V

Lighting Dimension

Thickness / Height

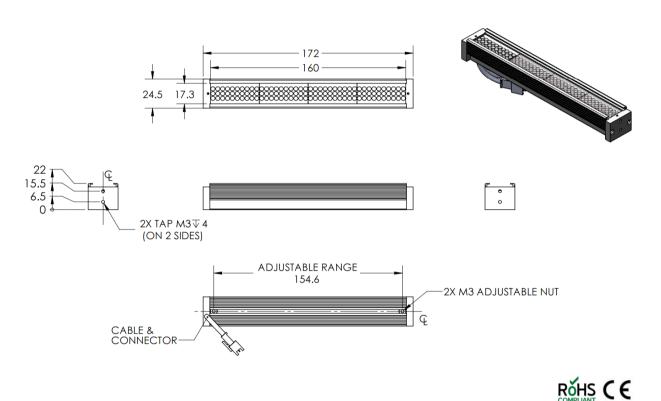

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	115 g
Length / Outer Diameter	172 mm
Width / Inner Diameter	24.5 mm

22 mm



LBRX-00-160-3-G-24V

Optical Information						
Part Number		LBRX-00-160-3-G-24V				
LED Color			GREEN			
	(nm)					
Wavelength		525 12200 10900 9840				
Intensity (±15%)	(Lux)	12200	10900			
Working Distance	(mm)	80	90	100		
Illumination (number of row)			3			
Illumination Active Area						
Active Length / Outer Diameter	(mm)	160				
Active Width / Inner Diameter	(mm)	17.3				
Emission angle	(deg.)	(deg.) 0				
Eye Safety Class (IEC62471)	EXEMPT					
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	168				
Power Consumption	(W)	4.03				
Lighting casing temperature,						
Operating after 60 minutes	°C	°C 47.6				
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage						
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)	(mA)	504				
(Constant current power supply)						
Max. Trigger Pulse Duration	(msec) 10					
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance	YES					
nons compilance		AFP				
Connection						
Connector Type (Default):		ICT CARD ADV				
Connector Type (Default):	/ · · ·		JST SMR-03V			
Cable Length out from lighting :	(mm)	p.	500	California de		
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
	<u> </u>					
Application						
Illumination Type	Direct Illumination					
Applicattion Use	General illumination, label inspection, character inspection, code recognition.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

