


ILLUMINATOR DATA-ID

LBRX-00-200-6-B-24V

Lighting Dimension

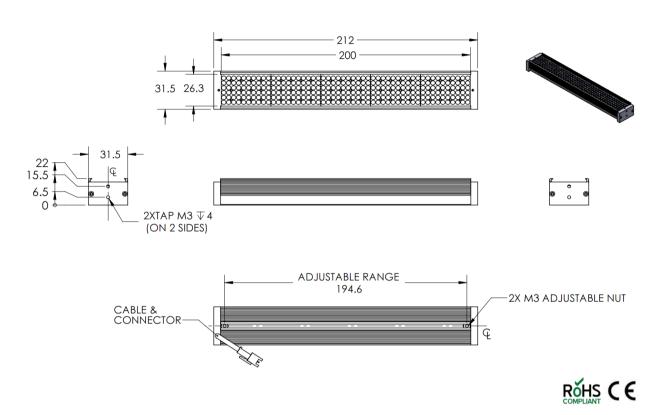

Mechanical Information	
Casing Material	Aluminium
Casing Material	Aummum
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	210 g
Length / Outer Diameter	212 mm
zengan / Cate ziameter	
Width / Inner Diameter	31.5 mm
Thickness / Height	22 mm



LBRX-00-200-6-B-24V

Optical Information						
Part Number			LBRX-00-200-6-B-24V			
LED Color			BLUE			
	(nm)					
Wavelength		45400	470			
Intensity (±15%)	(Lux)	15100	11300	9450		
Working Distance	(mm)	100	130	150		
Illumination (number of row)			6			
Illumination Active Area						
Active Length / Outer Diameter	(mm)		200			
Active Width / Inner Diameter	(mm)	26.3				
Emission angle	(deg.)	eg.) 0				
Eye Safety Class (IEC62471)	H H					
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
	(m 1)					
Continuous Current Power Consumption	(mA) (W)	360				
Power Consumption	(۷۷)	8.64				
Lighting casing temperature,						
Operating after 60 minutes	°C	°C 55				
Overlands to Overlands						
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage						
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)	(mA)	(mA) 1080				
(Constant current power supply)						
Max. Trigger Pulse Duration	(msec) 10					
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance	YES					
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	500				
Pin Configuration :		Pin	Signal	Cable Color		
5		1	LED+	RED		
		2	N.C.			
		3	LED -	WHITE		
		3	LL <i>U</i> -	VVIIIE		
			_			
Application						
Illumination Type	Direct Illumination					
Applicattion Use	General illumination, label inspection, character inspection, code recognition.					
111	General munimation, label inspection, character inspection, code recognition.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

