


LBRX-00-240-1-UV-24V

Lighting Dimension



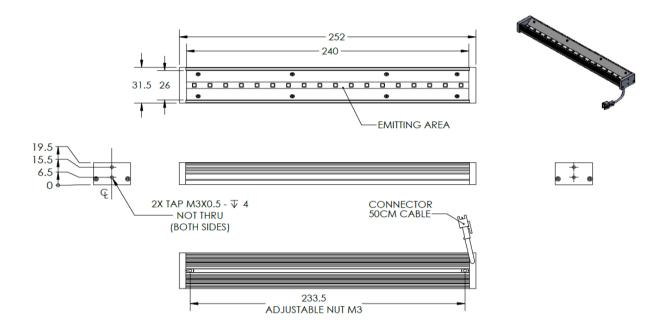

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	230 g
Length / Outer Diameter	252 mm
Width / Inner Diameter	31.5 mm
Thickness / Height	19.5 mm



LBRX-00-240-1-UV-24V

Optical Information					
Part Number		LBRX-00-240-1-UV-24V			
LED Color		UV			
Wavelength	(nm)	365			
Intensity (±15%)	(Lux)	NA			
Working Distance	(mm)	NA			
Illumination (number of row)		1			
Illumination Active Area					
Active Length / Outer Diameter	(mm)	240			
Active Width / Inner Diameter	(mm)	26			
Emission angle	(deg.)	0			
Eye Safety Class (IEC62471)	(==8.7	TBA			
		120			
Electrical Information					
Lighting Supply Voltage					
(constant voltage mode)		24V ± 2%			
Continuous Current	(mA)	300			
Power Consumption	(W)				
Lighting casing temperature,	` '				
Operating after 60 minutes	°C	59.2			
	T.				
Strobe Mode Specification					
Pulse Operation		YES			
Max. Lighting Supply Voltage	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended	at 36VDC		
(Constant voltage power supply)	(0)	ruising at 24VDC to 48VDC, 0-10% Duty Cycle, Necommended	at 30VDC		
Pulse Current, (Max. 10msec)	(000			
(Constant current power supply)	(mA)	900			
Max. Trigger Pulse Duration	(msec)	10			
Duty Cycle	(/	0-10%			
Additional Information					
Additional Cooling Method		**************************************			
Additional Cooling Method			Attached to machine part for better heat dissipation		
		ANG, ST, SD and SDA Series			
Intensity Controller Selection			1		
Intensity Controller Selection CE Conformity		YES	1		
Intensity Controller Selection			1		
Intensity Controller Selection CE Conformity		YES YES			
Intensity Controller Selection CE Conformity RoHS Compliance Connection		YES			
Intensity Controller Selection CE Conformity RoHS Compliance	(mm)	YES YES			
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	YES YES 1ST SMR-03V 500			
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default):	(mm)	YES YES JST SMR-03V 500	Cable Color RED		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	YES YES YES JST SMR-03V 500 Pin Signal	Cable Color		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	JST SMR-03V 500 Pin Signal 1 LED+	Cable Color RED		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	YES YES	Cable Color RED		
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	YES YES	Cable Color RED		
Intensity Controller Selection CE Conformity ROHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	YES YES	Cable Color RED		
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	YES YES	Cable Color RED WHITE		



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

