


ILLUMINATOR DATA-ID

LSW-00-050-2-B-24V

Lighting Dimension

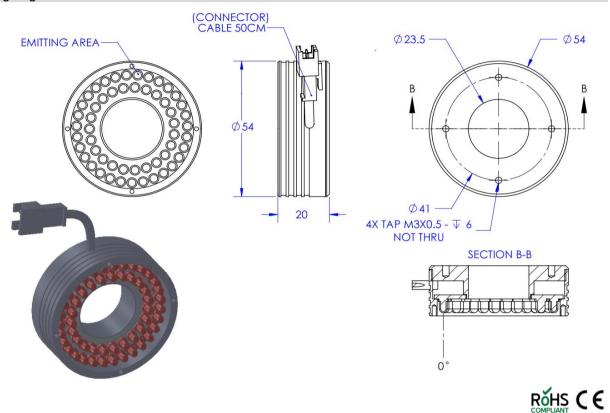

Mechanical Information	
Wechanical information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	60 g
Length / Outer Diameter	54 mm
Width / Inner Diameter	23.5 mm
Thickness / Height	20 mm



LSW-00-050-2-B-24V

Optical Information								
Part Number	I	LSW-00-050-2-B-24V						
LED Color		BLUE						
Wavelength	(nm)	470						
Intensity (±15%)	(Lux)	36600 34200 31900						
Working Distance	(mm)	63	68	73				
Illumination (number of row)	()	03	2	,,,				
Illumination Active Area			-					
Active Length / Outer Diameter	(mm)		47.7					
Active Width / Inner Diameter	(mm)		25.2					
Emission angle	(deg.)		0					
Eye Safety Class (IEC62471)	(ueg.)		II					
Eye Surety Glass (120024717)			"					
Electrical Information								
Lighting Supply Voltage								
(constant voltage mode)		24V ± 2%						
Continuous Current	(mA)	24V ± 27% 120						
Power Consumption	(W)		2.88					
Lighting casing temperature,	1		2.00					
Operating after 60 minutes	°c		56.6					
operating area of minutes	1 5 1		300					
Strobe Mode Specification								
Pulse Operation			YES					
Max. Lighting Supply Voltage	0.0	Dulaina at 24V	IDC to 40VDC 0 100/ Duty Code December and at	36,406				
(Constant voltage power supply)	(V)	Puising at 24v	DC to 48VDC, 0-10% Duty Cycle, Recommended at	36VDC				
Pulse Current, (Max. 10msec)								
(Constant current power supply)	(mA)		360					
Max. Trigger Pulse Duration	(msec)		10					
Duty Cycle	(IIISEC)		0-10%					
Additional Information								
Additional information								
Additional Cooling Method		Atta	ched to machine part for better heat dissipation	Attached to machine part for hotter heat discination				
Intensity Controller Selection			ANG, ST, SD and SDA Series					
Intensity Controller Selection CE Conformity			ANG, ST, SD and SDA Series YES					
Intensity Controller Selection			ANG, ST, SD and SDA Series					
Intensity Controller Selection CE Conformity RoHS Compliance Connection			ANG, ST, SD and SDA Series YES YES					
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default):			ANG, ST, SD and SDA Series YES YES YES SIST SMR-03V					
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)		ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500					
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default):	(mm)	Pin	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Signal	Cable Color				
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)		ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500	Cable Color RED				
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	Pin	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Signal					
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	Pin 1	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Signal LED +	RED				
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting:	(mm)	Pin 1 2 2	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Signal LED + N.C.	RED 				
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	Pin 1 2 2	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Signal LED + N.C.	RED 				
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	Pin 1 2 2	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 5000 Signal LED + N.C. LED -	RED 				
Intensity Controller Selection CE Conformity RoHS Compliance Connection Connector Type (Default): Cable Length out from lighting: Pin Configuration:	(mm)	Pin 1 2 3 3	ANG, ST, SD and SDA Series YES YES YES JST SMR-03V 500 Signal LED + N.C.	RED WHITE				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

