
LSW-15-038-2-B-24V

Lighting Dimension



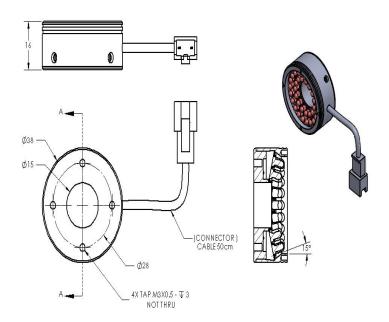

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	32 g
Length / Outer Diameter	38 mm
Width / Inner Diameter	15 mm
Thickness / Height	10.3 mm

LSW-15-038-2-B-24V

Optical Information							
Part Number		LSW-15-038-2-B-24V					
LED Color			BLUE				
Wavelength	(nm)	470					
Intensity (±15)	(Lux)	TBA TBA TBA					
Working Distance	(mm)	8	28	47			
Illumination (number of row)	()		2	**			
Illumination Active Area			-				
Active Length / Outer Dia.	(mm)	38					
Active Width / Inner Dia.	(mm)	15					
Emission angle	(deg.)		15				
Eye Safety Class (IEC62471)	(ueg.)		II				
Lye safety Class (IECO2471)							
Electrical Information							
Lighting Supply Voltage							
(constant voltage mode)		24V ± 2%					
Continuous Current	(mA)		90				
Power Consumption	(W)	2.16					
Lighting casing temperature,	,	2.10					
Operating after 60 minutes	°C		The				
Operating after 60 minutes	C	TBA					
Strobe Mode Specification							
Dulas Ou sustinu			VEC				
Pulse Operation		YES					
Max. Lighting Supply Voltage	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle					
(Constant voltage power supply)	(*)	Recommended at 36VDC					
Pulse Current, (Max. 10msec)	(mA)	270					
(Constant current power supply)							
Max. Trigger Pulse Duration	(msec)	10					
Duty Cycle		0-10%					
Additional Information							
Additional Cooling Method		Attached to machine part for better heat dissipation					
Intensity Controller Selection		ANG, SD, SDA and ST series					
CE Conformity		YES					
RoHS Compliance		YES					
Connection							
Connector Type (Default):		JST SMR-03V					
Cable Length out from lighting:	(mm)		500				
Pin Configuration :		Pin	Signal	Cable Color			
		1	LED +	RED			
		2	N.C.				
		3	LED -	WHITE			
Application							
Illumination Type	Direct Illumination						
Application Use		substrate inspection, label inspection, flat surface, fiducially recognition					
		Substitute inspection, rabet inspection, flat surface, fluturally recognition					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

