


# **ILLUMINATOR DATA-ID**

### LSW-45-050-2-G-24V



Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	70 g
Length / Outer Diameter	54 mm
Width / Inner Diameter	25 mm
Thickness / Height	20 mm

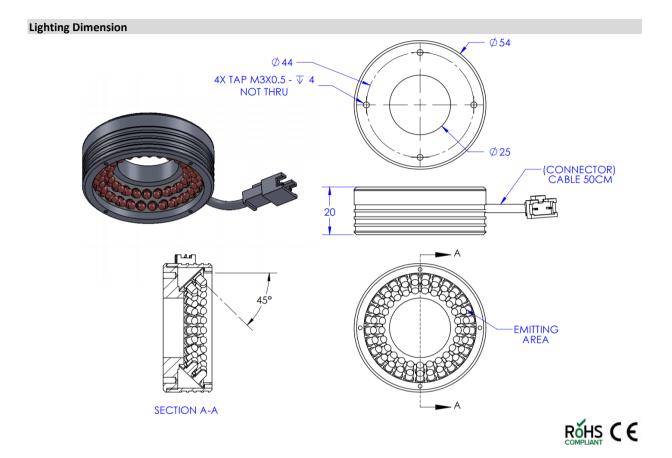

## LSW-45-050-2-G-24V

Optical Information									
Part Number				LSW-45-050-2-G-24V					
LED Color				GREEN					
Wavelength	(nm)			525					
Intensity (±15%)	(Lux)	103600 107900 110000 90800 68900							
Working Distance	(mm)	2	7	12	17	22			
Illumination (number of row)				2	•				
Illumination Active Area									
Active Length / Outer Diameter	(mm)	46							
Active Width / Inner Diameter	(mm)	30.7							
Emission angle	(deg.)								
Eye Safety Class ( IEC62471 )		EXEMPT							
Electrical Information									
Lighting Supply Voltage									
(constant voltage mode)				24V ± 2%					
Continuous Current	(mA)	120							
Power Consumption	(W)	2.88							
Lighting casing temperature,	,,	4.00							
Operating after 60 minutes	°C	54.7							
Strobe Mode Specification									
Pulse Operation		YES							
Max. Lighting Supply Voltage	(V)	Pulcing at 24V/DC to 49V/DC 0.10% Purby Cycle Personmented at 25V/DC							
(Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC							
Pulse Current, (Max. 10msec)	(mA)	360							
(Constant current power supply)	(mA)	500							
Max. Trigger Pulse Duration	(msec)	10							
Duty Cycle		0-10%							
Additional Information									
Additional Cooling Method		Attached to machine part for better heat dissipation							
Intensity Controller Selection		ANG, ST, SD and SDA Series							
CE Conformity		YES							
RoHS Compliance	YES								
Connection									
Connector Type (Default):			-	JST SMR-03V					
Cable Length out from lighting :	(mm)	500							
Pin Configuration :		Pin		Signal		Cable Color			
		1		LED +		RED			
		2		N.C.					
		3		LED -	1	WHITE			
		-	•						
Application									
Illumination Type		Direct Illumination							
Applicattion Use		Substrate inspection, label inspection, flat surface, fiducially recognition.							



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



### **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

