


MLBX2-00-090-2-B-24V

Lighting Dimension

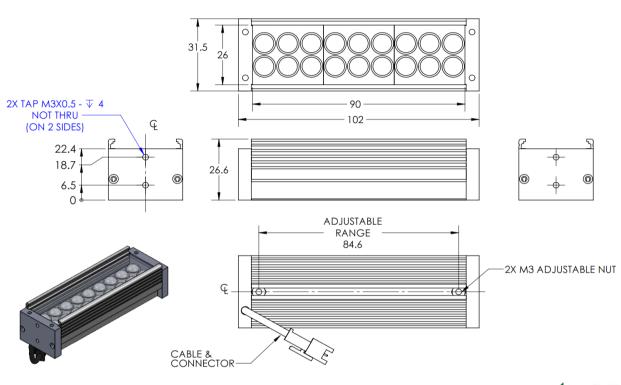

ROHS	C	ϵ
COMPLIANT	-	

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	96 g
Length / Outer Diameter	102 mm
Width / Inner Diameter	31.5 mm
Thickness / Height	26.6 mm



MLBX2-00-090-2-B-24V

Optical Information						
Part Number	MLBX2-00-090-2-B-24V					
LED Color		BLUE				
Wavelength	(nm)		450			
Intensity (±15%)	(Lux)	24850	10664.2	5637.4		
Working Distance	(mm)	50	100	150		
Illumination (number of row)	` ′		2			
Illumination Active Area						
Active Length / Outer Diameter	(mm)		90			
Active Width / Inner Diameter	(mm)	26				
Emission angle	(deg.)		0			
Eye Safety Class (IEC62471)	(ucg.)		II			
eye surely substituted in 2 j	1		¨			
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	144				
Power Consumption	(W)		3.46			
Lighting casing temperature,		3.40				
Operating after 60 minutes	°C		31.1			
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage						
(Constant voltage power supply)	(V)	Pulsing at 24	IVDC to 48VDC, 0-10% Duty Cycle, Recommended at	36VDC		
Pulse Current, (Max. 10msec)	 					
	(mA)		432			
(Constant current power supply) Max. Trigger Pulse Duration	(10			
Duty Cycle	(msec)		0-10%			
Additional Information						
Additional Cooling Method		Δ+	tached to machine part for better heat dissipation			
Intensity Controller Selection			ANG, ST, SD and SDA Series			
CE Conformity	1		YES			
RoHS Compliance	+		YES			
None compliance	1		123			
Connection						
Connector Type (Default):						
	1		IST SMR.JQV			
	(mm)		JST SMR-03V			
Cable Length out from lighting :	(mm)	Pin	500	Cable Color		
	(mm)	Pin 1	500 Signal	Cable Color		
Cable Length out from lighting :	(mm)	1	500 Signal LED +	RED		
Cable Length out from lighting :	(mm)	1 2	500 Signal LED + N.C.	RED 		
Cable Length out from lighting :	(mm)	1	500 Signal LED +	RED		
Cable Length out from lighting :	(mm)	1 2	500 Signal LED + N.C.	RED 		
Cable Length out from lighting :	(mm)	1 2	500 Signal LED + N.C.	RED 		
Cable Length out from lighting : Pin Configuration : Application	(mm)	1 2	500 Signal LED + N.C. LED -	RED 		
Cable Length out from lighting : Pin Configuration :	(mm)	1 2 3 3	500 Signal LED + N.C.	RED WHITE		



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

