


MLBX2-00-090-2-G-24V

Lighting Dimension



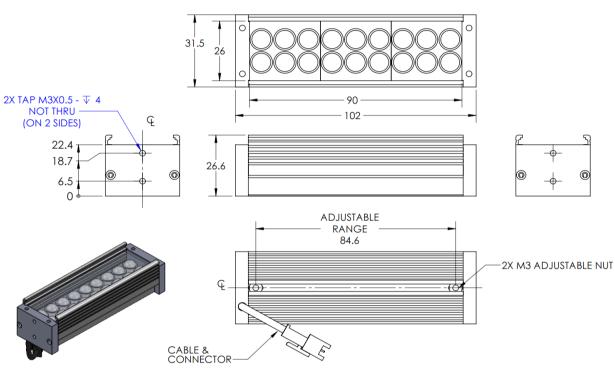

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	96 g
Length / Outer Diameter	102 mm
Width / Inner Diameter	31.5 mm
Thickness / Height	26.6 mm



MLBX2-00-090-2-G-24V

Optical Information						
Part Number		MLBX2-00-090-2-G-24V				
LED Color		GREEN				
Wavelength	(nm)		540			
Intensity (±15%)	(Lux)	43310	19567.6	10650		
Working Distance	(mm)	50	100	150		
Illumination (number of row)	(111111)	30	2	150		
	-		2			
Illumination Active Area	()		00			
Active Length / Outer Diameter	(mm)	90				
Active Width / Inner Diameter	(mm)	26				
Emission angle	(deg.)	0				
Eye Safety Class (IEC62471)	EXEMPT					
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	144				
Power Consumption	(W)	3.46				
Lighting casing temperature,						
Operating after 60 minutes	°C		32.4			
Strobe Mode Specification						
Pulse Operation			YES			
Max. Lighting Supply Voltage						
(Constant voltage power supply)	(V)	Pulsing at 24	IVDC to 48VDC, 0-10% Duty Cycle, Recommended a	at 36VDC		
	-					
Pulse Current, (Max. 10msec)	(mA)	(mA) 432				
(Constant current power supply)						
Max. Trigger Pulse Duration	(msec)					
Duty Cycle			0-10%			
Additional Information						
Additional Cooling Method		At	tached to machine part for better heat dissipation			
Intensity Controller Selection			ANG, ST, SD and SDA Series			
CE Conformity			YES			
RoHS Compliance	+		YES			
Rons compliance			TES			
Connection						
C		IST SMR-03V				
Connector Type (Detault):			JST SMR-03V			
Connector Type (Default): Cable Length out from lighting:	(mm)		JST SMR-03V 500			
Cable Length out from lighting :	(mm)	Pin	500	Cable Color		
	(mm)	Pin 1	500 Signal	Cable Color		
Cable Length out from lighting :	(mm)	1	500 Signal LED +	RED		
Cable Length out from lighting :	(mm)	1 2	500 Signal LED + N.C.	RED 		
Cable Length out from lighting :	(mm)	1	500 Signal LED +	RED		
Cable Length out from lighting :	(mm)	1 2	500 Signal LED + N.C.	RED 		
Cable Length out from lighting : Pin Configuration :	(mm)	1 2	500 Signal LED + N.C.	RED 		
Cable Length out from lighting : Pin Configuration : Application	(mm)	1 2	S00 Signal LED + N.C. LED -	RED 		
Cable Length out from lighting : Pin Configuration : Application Illumination Type	(mm)	1 2 3	S00 Signal LED + N.C. LED - Direct Illumination	RED WHITE		
Cable Length out from lighting : Pin Configuration : Application	(mm)	1 2 3	S00 Signal LED + N.C. LED -	RED WHITE		



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

