


## LBRQ-00-200-3-G-24V



Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	900 g
Length / Outer Diameter	280 mm
Width / Inner Diameter	230 mm
Thickness / Height	34.2 mm

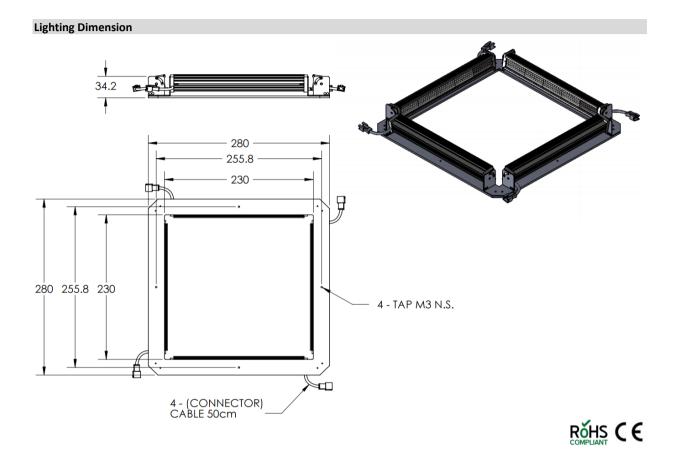

## LBRQ-00-200-3-G-24V

Optical Information						
Part Number		LBRQ-00-200-3-G-24V				
LED Color		GREEN				
Wavelength	(nm)		525			
Intensity (±15%)	(Lux)	TBA TBA TBA				
Working Distance	(mm)	335	346	357		
Illumination (number of row)	()	333	3	557		
Illumination Active Area						
Active Length / Outer Diameter	(mm)	280				
Active Width / Inner Diameter	(mm)	230				
Emission angle	(deg.)		0			
Eye Safety Class ( IEC62471 )	(ueg.)	EXEMPT				
eye surety class ( 1200247 2 )			EXEMIT.			
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)		24V ± 2%				
Continuous Current	(mA)	840				
Power Consumption	(W)	20.16				
Lighting casing temperature,	(44)	20.10				
Operating after 60 minutes	°C	C TBA				
Operating arter of minutes			100			
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage						
(Constant voltage power supply)	(V)	(V) Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)		-				
(Constant current power supply)	(mA)	2520				
Max. Trigger Pulse Duration	(mcoc)	10				
Duty Cycle	(IIIsec)	(msec) 10 0-10%				
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection		ANG, ST, SD and SDA Series				
CE Conformity		YES				
RoHS Compliance		YES				
Connection						
Connector Type (Default):		JST SMR-03V				
Cable Length out from lighting :	(mm)	<u> </u>	500			
Pin Configuration :		Pin	Signal	Cable Color		
		1	LED +	RED		
		2	N.C.			
		3	LED -	WHITE		
		<u> </u>				
Application						
Illumination Type		Direct Illumination				
Applicattion Use		General illumination, label inspection, character inspection, code recognition.				



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



## **VISION** CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

