


ILLUMINATOR DATA-ID

LBRX-00-160-6-B-24V

Lighting Dimension

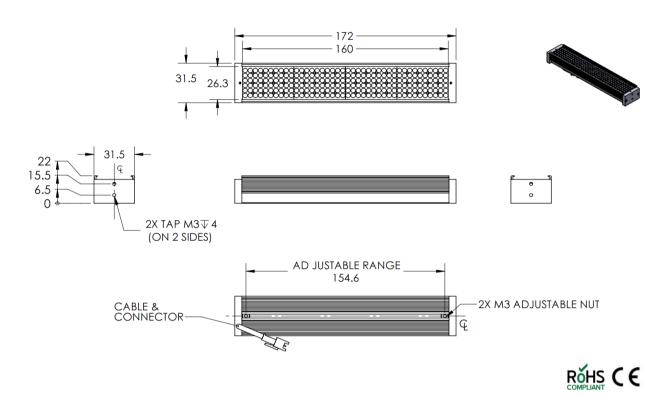

Mechanical Information	
Wiechanical information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0 - 45°C, Humidity 20-85%
Weight	170 g
weight	1/0g
Length / Outer Diameter	172 mm
Width / Inner Diameter	31.5 mm
Thickness / Height	22 mm



LBRX-00-160-6-B-24V

Optical Information						
Part Number			LBRX-00-160-6-B-24V			
LED Color			BLUE			
Wavelength	(nm)		470			
Intensity (±15%)	(Lux)	17000 12400 10100				
Working Distance	(mm)	100	130	150		
Illumination (number of row)	(111111)	100	6	150		
Illumination Active Area			0			
Active Length / Outer Diameter	(mm)		160			
Active Width / Inner Diameter						
	(mm)	26.3				
Emission angle Eye Safety Class (IEC62471)	(deg.)	0 II				
-ye doicty closs (1606-471)						
Electrical Information						
Lighting Supply Voltage						
(constant voltage mode)	1	24V ± 2%				
Continuous Current	(mA)	288				
Power Consumption	(W)	6.91				
Lighting casing temperature,	(**,	0.31				
Operating after 60 minutes	°C	°C 56.2				
	50%					
Strobe Mode Specification						
Pulse Operation		YES				
Max. Lighting Supply Voltage	4.0					
(Constant voltage power supply)	(V)	/) Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC				
Pulse Current, (Max. 10msec)		004				
(Constant current power supply)	(mA)	nA) 864				
Max. Trigger Pulse Duration	(msec)	(msec) 10				
Duty Cycle	0-10%					
Additional Information						
Additional Cooling Method		Attached to machine part for better heat dissipation				
Intensity Controller Selection	ANG, ST, SD and SDA Series					
CE Conformity	YES					
RoHS Compliance	YES					
Connection						
Connector Type (Default):	1 1		JST SMR-03V			
Cable Length out from lighting :	(mm)	p:	500	C.H. C.		
Pin Configuration :		Pin	Signal	Cable Color		
	—	1	LED+	RED		
	—	2	N.C.			
		3	LED -	WHITE		
	1					
Application Type	Direct Illumination					
Illumination Type Applicattion Use						
Applicattion use	General illumination, label inspection, character inspection, code recognition.					



Thank you for downloading this document from www.machine-vision-shop.com

If you have any questions, you need help composing the right package for your application or do you want to order?

Feel free to contact us via e-mail at sales@vision-consultancy.nl or visit our webshop.

Our vision experts are happy to help you.



Natascha Overhof



Christian Crompvoets



VISION CONSULTANCY

Robert Schumandomein 2 6229 ES Maastricht The Netherlands

+31 (0) 438 522 651

sales@vision-consultancy.nl www.machine-vision-shop.com

